



**Product Features**


- to sample drinking water and determine microbiological parameters according to the German TrinkwV drinking-water regulation
- for simple retrofitting at the output of the angle valve
- suitable for angle valves with 10 mm outlet compression connection
- sampling pipe can be disinfected by flame
- valve completely chrome-plated
- PTFE seat gasket
- inlet 10 x 1.25 pipe, outlet G3/8 male thread with compression nut for 10 mm pipe
- with integrated check cartridge type EB acc. EN 1717
- valve is operated with 5 mm allen key (not in package)
- made of brass, nickel plated
- free from dead spots
- incl. Allen key

**Standards and Approvals**

- DVGW approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- DIN 50930-6

**Technical Data**

- pressure rating PN 10
- max. operating temperature 90 °C

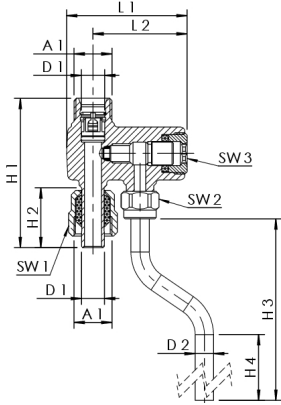

part no.	DN	A1	D1 (mm)	D2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)	kg	
1880101000	10	G 3/8	10	8	65	26	161	110,5	52,5	41	19	15	5	0,296